


How to change the batteries in the Door Protect




To change the battery:

1. Dismount the detector from the Smart Bracket attachment panel.
2. Turn off Door Protect.

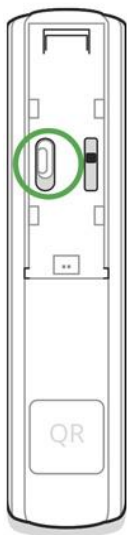

3. Unfasten the clamp and remove the front panel of the detector.

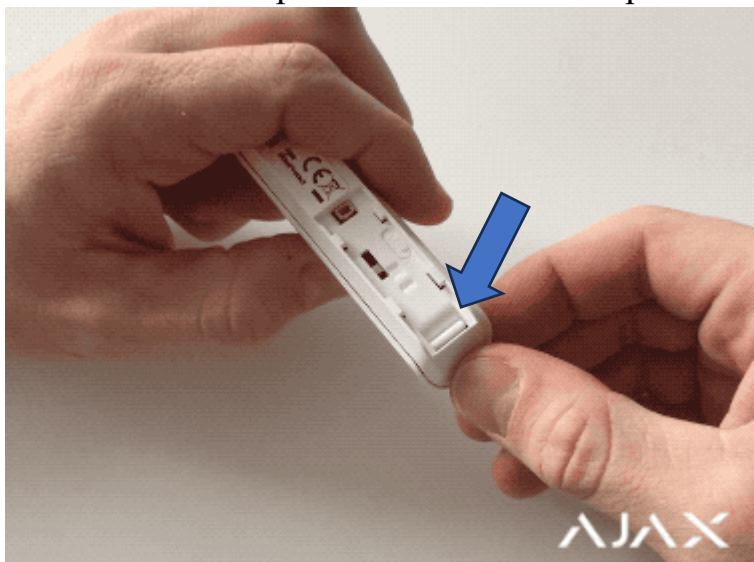

4. Change the battery for a new one of type CR123A, observing the polarity. We recommend installing the following batteries to ensure that the Ajax device operates for the calculated time:

- Panasonic CR123A Industrial Lithium Battery, 3 V (item model number — 4330203048, manufacturer — Indonesia).
- Huiderui CR123A, 3 V, 1,600 mAh, LiMnO₂.

If other batteries are installed, the operating time may differ from the calculated time.

Never install used or damaged batteries.

5. Reattach the back panel of the detector.
6. Turn on the device and check the battery status using the app.

The battery status is not updated instantly but during the next polling of the devices (by default, every 36 seconds).